





"Make Life Safer"

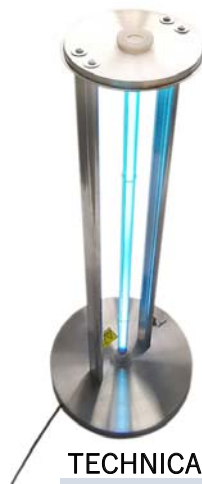

UV-V and Ozone Germicidal Table Light

(NLUVTD75OZ)

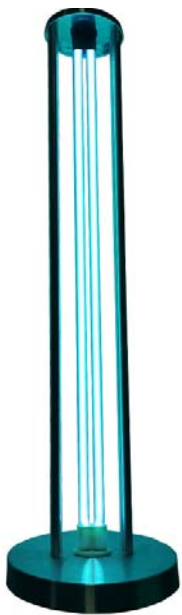

TECHNICAL FEATURES

Lamp Model	NLUVTD75OZ
Lamp power Watt	75w
UV wavelength	UV-V 185nm Ozone
Static area applicable	up to 85m ²
Ozone flow generated (g/hour)	N/A
Disinfection cap. (m ³ /h) in millijoules/cm ² (30mj/cm ²)	N/A
Auxiliary control devices (timer and timer time, human presence sensor, ignition delay and ignition delay time)	remote timing control 15/30/60 minutes
Arm adjustment angle in degrees °	N/A - 360° disinfection
Supply voltage in volts	AC 165-265V
Absorption in Ampere	0,34A
Estimated tube life	>13000Hrs
Type of tube	Tungsten lamp
Lamp dimensions	Ø243*880mm
Packaging dimensions	280*280*890mm
Lamp weight	1,75Kg
Weight with packaging	2Kg
Frame construction material and screws	Stainless stell and aluminium alloy
Operating temperature	-20° C <--> 60° C
IP dust and humidity protection degree	N/A

Disinfection with ultraviolet rays is an effective way to destroy microorganisms including bacteria, viruses, mold spores, acting on the DNA-RNA of microorganisms by irradiating with the appropriate wavelength of ultraviolet rays UV-C at 253.7nm or UV- V at 185nm with generation of Ozone gas leads to the death of the cell, after a correct exposure to rays and gases, a mortality level of virus bacteria and spores exceeds 99.9%.

These destroy the DNA molecular bonds of microorganisms, producing thymine dimers in their DNA and destroying them, rendering them harmless or impeding their growth and reproduction.

The ignition times are variable depending on the power of the lamp compared to the surface to be irradiated. The dosage is measured in microwatts per second per square centimeter: $\mu\text{W} / \text{cm}^2$. Dosages from 2 to 8 $\mu\text{W} / \text{cm}^2$ kill 99.9% of spore virus bacteria.

When the lamp is turned on in the room, there must be no human presence, animals and plants, the sterilization cycles normally last 15-30-60 minutes or more for large rooms greater than 150 m², the cycles are regulated by a timer or by a remote control depending on the model.

